

Unit Information

Model #: 2206 / Item #07050
UPC-IC (12 Digit): 01673070502

Master Pack Dimensions

Weight: 5.8 lbs. (2.6 kg)
Cube: 0.93 ft³ (0.02 m³)
Quantity: 6

Specifications

Power Source: Alkaline or Carbon Zinc 6V
Lantern Battery
Bulb/Lamp: KPR 113
Bulb/Lamp Life: 15 Hours
Light Output: 50,000 Beam Candlepower
Weight (Without batteries): 14.0 oz

Components

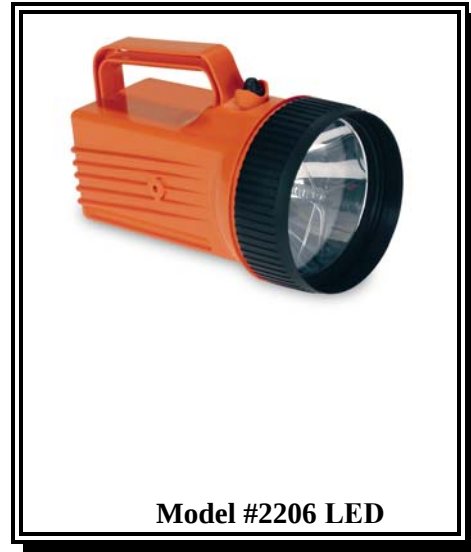
Lens Ring: Polypropylene (Black)
Lens: Unbreakable Tuflexx®
Reflector: Polycarbonate
Lantern Box: Polypropylene (Safety Orange)
Battery Connector: ABS, Spring brass & tin
coated steel
Switch: Rubber & co-polymer

Unit Dimensions

Length: 8.2 in. (20.9 cm)
Width: 4.9 in. (12.4 cm)
Height: 5.6 in. (14.2 cm)

Safety Approvals

UL/CUL: Class I, Div 1, Group C & D
Class II, Div 1, Group G
Operating Temp T3B
Class I Zone 1 Group IIB & IIA
MSHA Approved

**Product Features**

- For use in hazardous atmospheres
- Division 1 UL & CUL approved
- Waterproof & floating
- LED
- Alkaline Battery
- Switch guard protects switch on impacts
- Optional stand
- Spare bulb compartments
- Oversized reflector for more light output
- Glove size handle
- Circuit Breaking Mechanism

<u>Accessories</u>	<u>Description</u>
20414	LED

