





**DO NOT ACCEPT COPIES, BUT GO FOR THE ORIGINAL ONLY.
PTR HOLLAND® GROUP, ORIGINATOR OF THE PILOT / EMBARKATION LADDER CLAMPING SYSTEMS.**

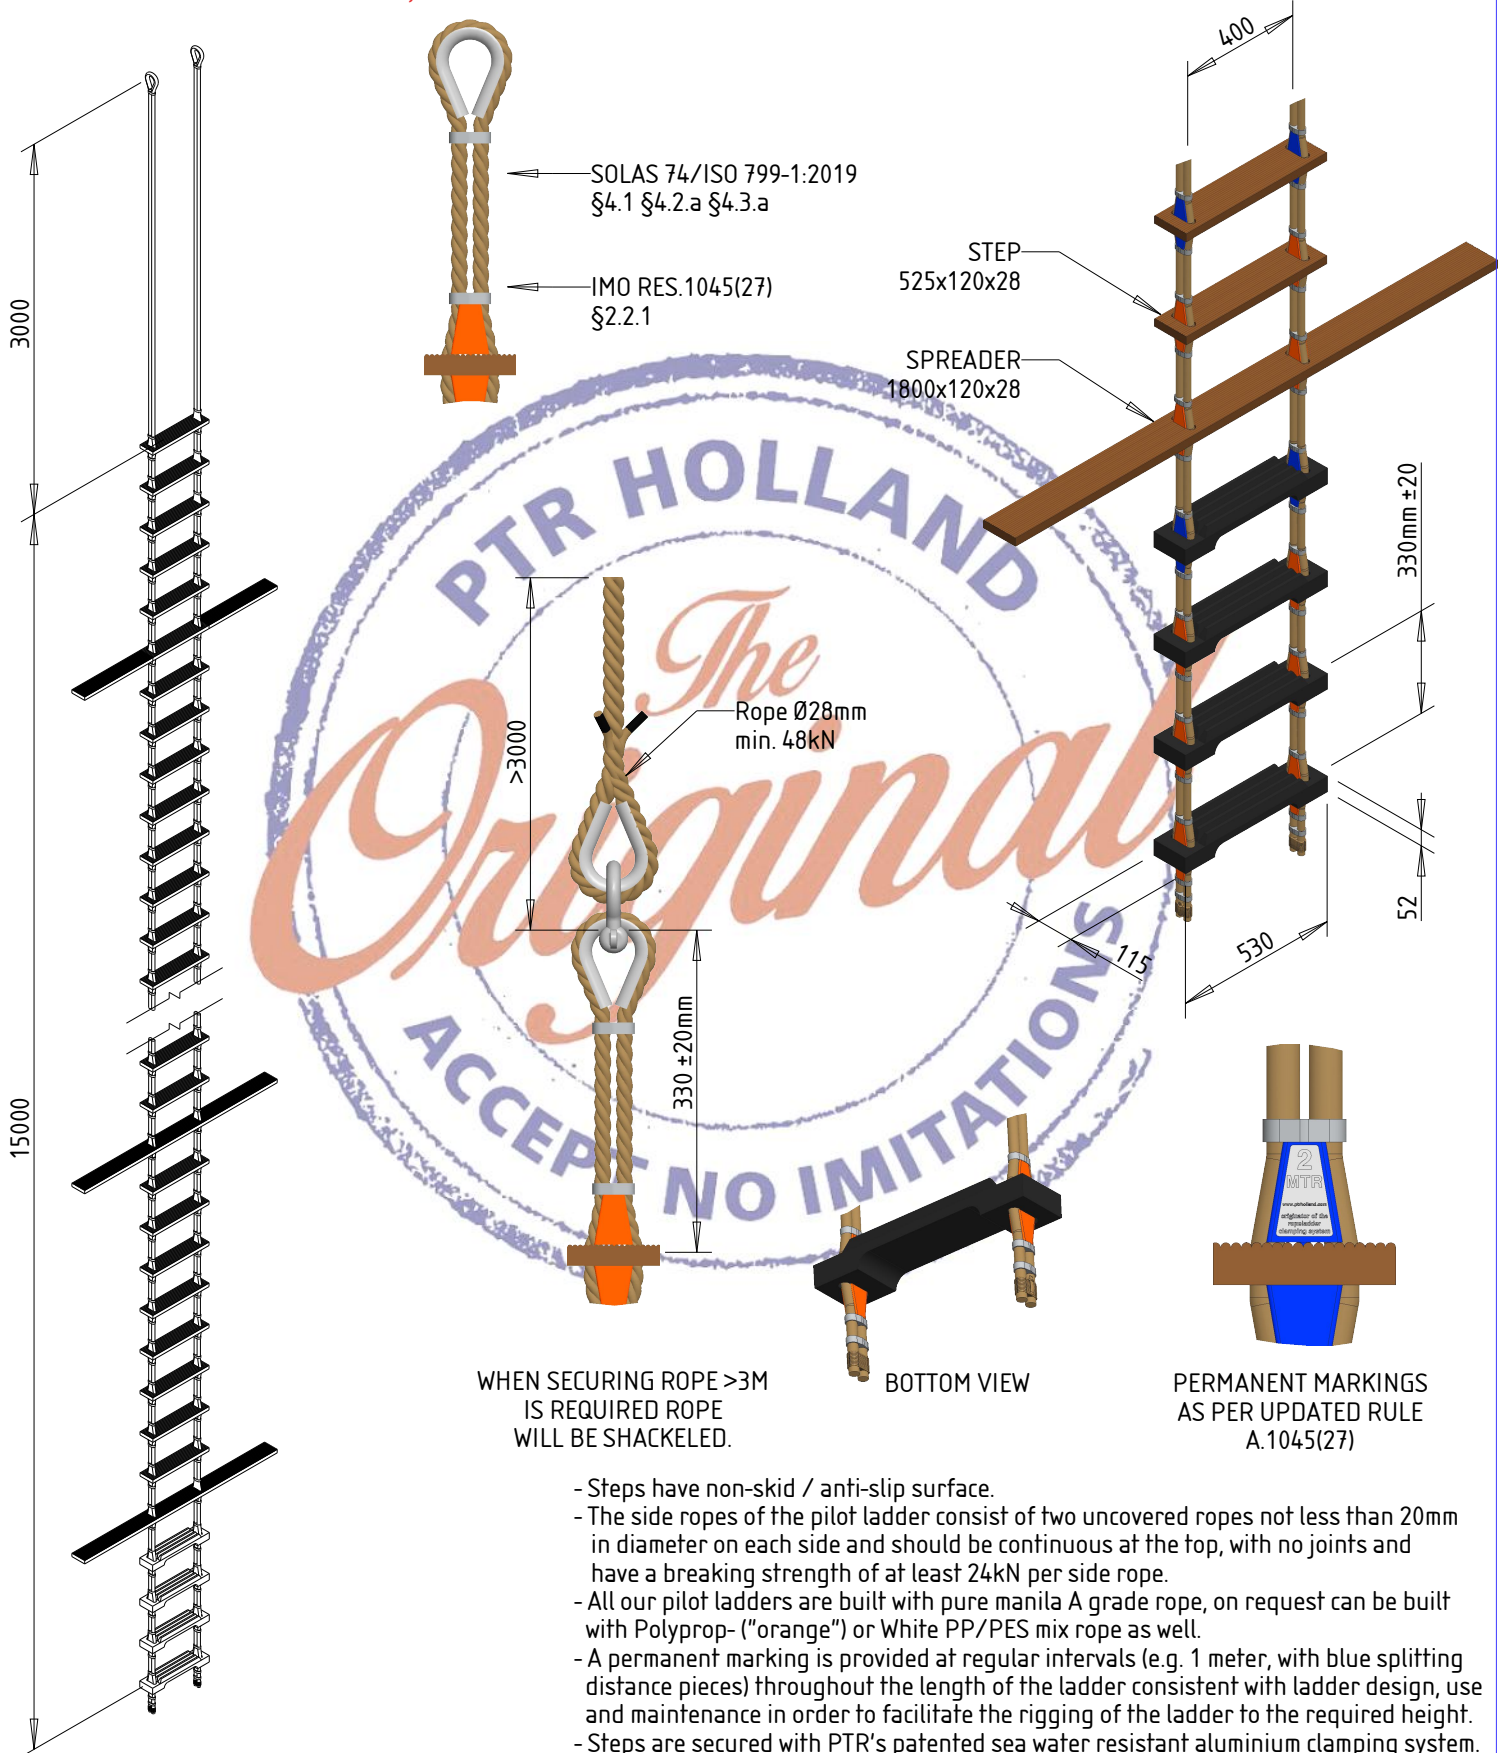

- Steps have non-skid / anti-slip surface.
- The side ropes of the pilot ladder consist of two uncovered ropes not less than 20mm in diameter on each side and should be continuous at the top, with no joints and have a breaking strength of at least 24kN per side rope.
- All our pilot ladders are built with pure manila A grade rope, on request can be built with Polyprop- ("orange") or White PP/PES mix rope as well.
- A permanent marking is provided at regular intervals (e.g. 1 meter, with blue splitting distance pieces) throughout the length of the ladder consistent with ladder design, use and maintenance in order to facilitate the rigging of the ladder to the required height.
- Steps are secured with PTR's patented sea water resistant aluminium clamping system.

| | | | | | |
|--|---|-----------------|---|--------|----|
| Producer: | PTR HOLLAND GROUP | Material: | HARDWOOD | | |
| Title: | THETIS U.D. PILOT LADDER | Approval: | M.E.D. according ISO 799-1:2019 A.1045(27) SOLAS 74 | | |
| Drawing: | WPL15-37-5-4_U.D. | Components: | 37 Steps 5 Spreaders 4 Rubber Steps | | |
|  <p>ROTTERDAM · SINGAPORE · HOUSTON · NEWCASTLE · PIRAEUS</p> <p>The mark of responsible forestry FSC® C126587</p>  |  | Weight: | 129kg | Scale: | |
| | | Date: | 25-Feb-2021 | Size: | A4 |
| | | Drawn By: | BLS-Engineering.com | Units: | mm |
| | | Drawing number: | 8-1112-4315 | Rev. | - |